

I. DESCRIPTION

OST-K is an insulated scissor attic ladder designed to provide safe and easy access to non-inhabited spaces. OST-K is recommended for garages, inside houses, projects with insulation requirements.

II. STRUCTURE

No.	Element	Description
1	Hatch	Insulated sandwich type, white. Thickness: 1 3/8" Thermal insulation thickness: 1 1/8" No lock – unloading mechanism automatically presses the hatch to the box, opening with the use of a control rod
2	Frame	Pinewood ladder box with quick-installation brackets included. Height: 5 1/2"
3	Ladder	Metal scissor ladder
4	Step	Metal, equipped with anti-slip profile: width: 3 1/8" length: 11 7/8"
5	Standard accessories	Control rod for opening the hatch Installation brackets

III. DIMENSIONS

No.	Dimensions	Room height
1	22 1/2" x 31 1/2"	standard: 8'2 3/8" - 9'2 1/4" adjustable to: 7'6 1/2" to 10'10"* (requires additional steps details in chart below)

IV. TECHNICAL PARAMETERS


Maximum loading	350 lbs
Heat transfer coefficient	R-value: 5.2



VI. ASSEMBLY INFORMATION

The OST-K Attic Ladder is delivered to the customer fully assembled. The product is installed with the use of mounting brackets included to the ladder (maximum ceiling thickness is 13 3/4").

Installation of the product must be carried out in accordance with the included fitting instructions.

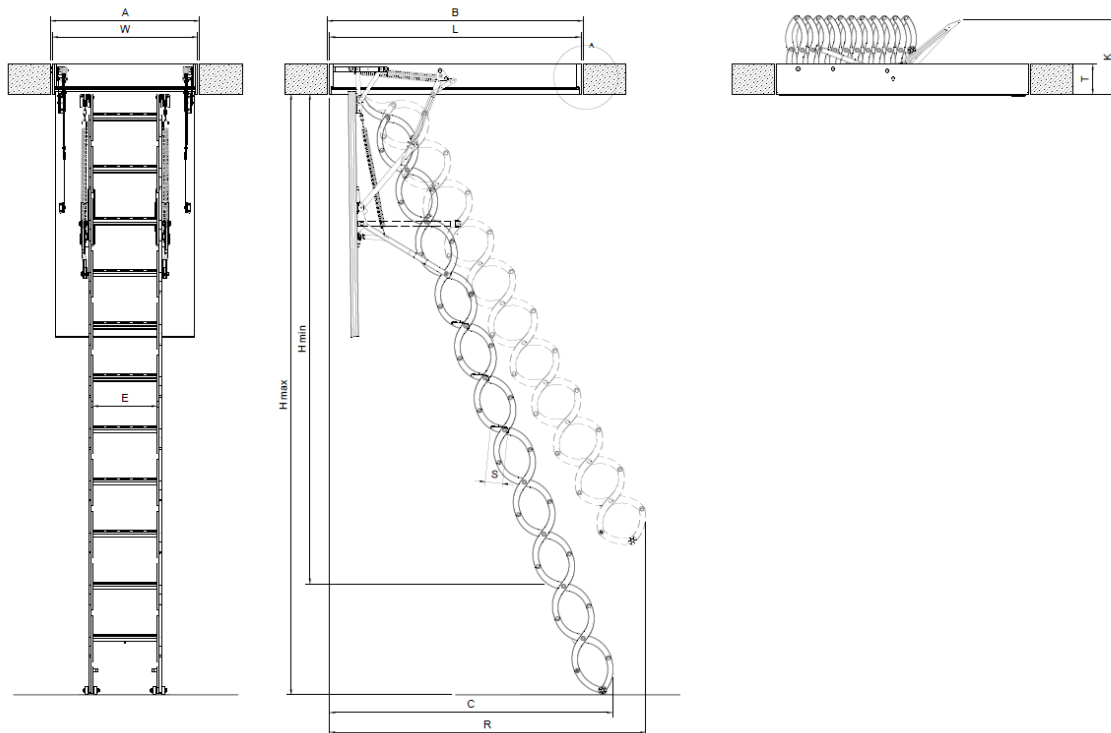

OST-K 22,5"x 31,5"		
Ceiling height	H	8' 2 3/8" - 9' 2 1/4"
Rough opening	AxB	22 1/2"x31 1/2"
Outside frame dimensions		22"x31"
Inside frame dimensions		20 1/2" x 29 1/4"
Projection	R	59"
Landing space	C	57 1/2" - 52 3/4"
Folded ladder height	K	15"
Frame height		5 1/2"
Approx. Weight (lbs)		84
Step lenght	E	11 7/8"
Step width		3 1/8"
Possibility of adding additional steps		LSS-31

	1 step removed	1 additional step	2 additional steps
H	7'6 1/2" - 8'2 3/8"	9'2 1/4" - 9'10 1/8"	9'10 1/8" - 10'10"